THE COMMISSIONER OF PATENTS AND TRADEMARKS
WASHINGTON, D.C. 20231

Case Docket No.: 1576/1

Transmitted herewith for filing is the patent application of

Inventor: ITZIK BEN-BASSAT ET AL.

For: SATELLITE COMMUNICATION CARD

Enclosed are:

☒ 3 sheets of _infomal_ drawing(s).

☒ An assignment of the invention to GILAT SATELLITE NETWORKS LTD.

☐ A certified copy of a _____ application.

☐ An associate power of attorney.

☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.

☐ Other - _____

The filing fee has been calculated as shown below:

	(Col.1)	(Col.2)	SMALL ENTITY			OTHER THAN A SMALL ENTITY	
FOR:	NO.FILED	NO. EXTRA	RATE	FEE	OR	RATE	FEE
BASIC FEE				$ 380	OR		$ 760
TOTAL CLAIMS	23 - 20=	3	x9=	$ 27	OR	3 x18=	$ 54
INDEP CLAIMS	5 - 3=	2	x39	$	OR	2 x78	$ 156
... Recordal of Assignment	40			$	OR		$ 40
			TOTAL	$	OR	TOTAL	$ 1010

* If the difference in Col.1 is less than zero, enter "0" in Col.2

☒ Please charge my Deposit Account No. 06-2140 in the amount of **$ 1010** . A duplicate copy of this sheet is enclosed.

☐ A check in the amount of $___ to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 06-2140.A duplicate copy of this sheet is enclosed.

　　☒ Any additional filing fees required under 37 CFR 1.16.
　　☒ Any patent application processing fees under 37 CFR 1.17.

☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 06-2140. A duplicate copy of this sheet is enclosed.

　　☒ Any patent application processing fees under 37 CFR 1.17.
　　☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of allowance, pursuant to 37 CFR 1.311(b).
　　☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully,

Mark M. Friedman
Reg. No. 33,883

Mark M. Friedman
DR. MARK FRIEDMAN LTD.
C/O Anthony Castorina
2001 Jefferson Davis Highway
Suite 207
Arlington, Virginia 22202

Inventors: Itzik Ben-Bassat, Ido Ophir, Rafi Boneh, Yossi Gal, Ariel Goldfarb, Tal Marcus, Ofer Shafir, David Rahamim, Amir Comforti, Yariv Hayoun, Oren Sheich and Eran Ridel

Title: SATELLITE COMMUNICATION CARD

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates generally to satellite communications, and specifically to personal computer cards for use in satellite communication by radio frequency.

Very small aperture terminals (VSATs), comprising a small satellite dish or flat-plate antenna and appropriate modulating and demodulating hardware coupled to a dedicated computer, are known in the art as means for transferring data directly between locations via a satellite. VSATs are typically used for data exchange in point-to-multipoint data networks, such as automated teller machines (ATMs) and point-of-sale systems, and may also be used for other types data transfer such as direct video broadcasting (DVB).

Personal computer cards capable of receiving signals directly from satellite transmissions are also known in the art. For example, Gilat Satellite Networks Ltd., of Petah Tikva, Israel, produces a satellite receiver card called "SkySurfer" for installation in a personal computer. The card plugs into an industry-standard PCI bus, and is designed to receive direct video broadcasts using a coaxial cable connected to a dish antenna.

European patent application EP 0-734-140, whose disclosure is incorporated herein by reference, describes a portable satellite communications terminal based on a personal computer (PC) . An interface card is inserted into the PC, enabling the PC to

communicate with a satellite antenna through an external modulation/demodulation unit followed by an external radio frequency (RF) subsystem coupled to the antenna.

SUMMARY OF THE INVENTION

5   It is an object of some aspects of the present invention to provide apparatus and methods for signal transmission from a personal computer.

It is a further object of some aspects of the present invention to provide apparatus and methods for communication between a personal computer and a remote transmitter/receiver via satellite.

10   In preferred embodiments of the present invention, a plug-in communications card in a PC generates modulated radio frequency (RF) signals, which are conveyed via a coaxial cable to a power amplifier and an upconverter of an antenna system, for transmission via satellite. The card comprises a power connector which enables the power from a DC power supply to be conveyed via the card and the cable to the

15   antenna system. Most preferably, the power supply is external to the computer. Thus signals and power to operate the upconverter and the power amplifier are transferred on the coaxial cable. The card plugs into an industry-standard bus in the PC, which controls the card's operation and conveys data to the card for transmission via the satellite.

20   The communications card comprises a frequency synthesizer for generating and transmitting the RF signals, preferably in a range between about 950 MHz and 3000 MHz or in any sub-range therein. The signals are conveyed via the coaxial cable to the upconverter and the power amplifier, which are preferably contained in the antenna system. The power level of the signals from the synthesizer is preferably of

25   the order of 1 mW. The upconverter and power amplifier convert the RF signals to

higher frequencies and higher power, for transmission by an external dish or flat-plate antenna. Most preferably, the signals are modulated by a keying modulator, whose modulation scheme is user-selectable according to any standard modulation system, under control of the PC.

5 Before modulation, the signals are encoded by an encoder, also under the control of the PC, preferably using forward error correction (FEC) encoding or concatenated coding.

In some preferred embodiments of the present invention, the communications card comprises a fast interface bus connector, which enables the communications card 10 to communicate directly with one or more other cards without needing to go through the PC bus. Preferably, a fast parallel data bus is used as the fast interface bus. Most preferably, the communications card uses the fast interface bus to communicate directly with a receiver card, having a corresponding fast interface bus connector, installed in the PC. When the receiver card is present, the fast interface bus may be 15 used to transfer a synchronizing clock recovered from signals received by the receiver card, and transmissions from the communications card may be timed accordingly, as described, for example, in U.S. Patent Application 09/135,502, entitled, "Bi-Directional Communications Protocol," to Ben-Bassat et al., which is assigned to the assignee of the present patent application and incorporated herein by reference.

20 There is therefore provided, in accordance with a preferred embodiment of the present invention, a transmitter card for a personal computer, including:

a circuit board which plugs into the personal computer and which is coupled to exchange data via an industry-standard bus in the personal computer; and

radio frequency modulation circuitry on the circuit board, which receives the 25 data and transmits radio frequency signals responsive thereto.

Preferably, the circuitry includes a frequency synthesizer generating the radio frequency signals.

Preferably, the frequency generated by the frequency synthesizer is set by a controller on the circuit board.

5 Alternatively, the frequency generated by the frequency synthesizer is set by conveying instructions via the computer bus.

Preferably, the card is coupled to an external antenna system, and includes a connector, through which a DC source external to the card powers the antenna system.

Preferably, the frequency modulation circuitry is coupled to convey the radio

10 frequency signals to the antenna system via the connector.

Preferably, the modulation circuitry modulates the transmitted signals according to a predefined protocol in accordance with a command conveyed to the card via the industry-standard bus.

Alternatively, the modulation circuitry includes an encoder which encodes

15 error correction into the transmitted signals according to a predefined protocol in accordance with a command conveyed to the card via the industry-standard bus.

Alternatively, the card includes an auxiliary connector through which the card is coupled to at least one other card located in the computer, such that signals pass between the cards without passing through the industry-standard bus.

20 Preferably, the signals are transmitted to a satellite.

There is further provided, in accordance with a preferred embodiment of the present invention, an RF communication card for a personal computer, including:

a circuit board which plugs into the personal computer and which is coupled to exchange data via an industry-standard bus in the personal computer;

RF circuitry on the circuit board, which receives the data and processes radio frequency signals responsive thereto; and

an auxiliary connector through which the card is coupled to at least one other card located in the computer, such that signals pass between the cards without passing 5 through the industry-standard bus.

Preferably, the communication card conveys a synchronizing signal via the auxiliary connector.

There is further provided, in accordance with a preferred embodiment of the present invention, a satellite transceiver for a personal computer, including:

10 a transmitter card which plugs into the personal computer and which is coupled to exchange data via an industry-standard bus in the personal computer and which transmits radio frequency signals responsive to the received data;

a receiver card which plugs into the personal computer and which is coupled to transfer data via the industry-standard bus and which receives radio frequency 15 signals and converts the received signals to data for transfer via the bus; and

an auxiliary bus directly connecting the transmitter card and the receiver card.

Preferably, the transmitter card and the receiver card include respective connectors coupling the cards to the auxiliary bus.

There is further provided, in accordance with a preferred embodiment of the 20 present invention, a method for transmitting a radio frequency signal directly from a personal computer, including:

mounting a transmitter card in the personal computer;

conveying data to the card via an industry-standard computer bus in the personal computer; and

25 transmitting the radio frequency signal from the card responsive to the data.

Preferably, conveying data to the card includes determining a frequency band of the signal.

Alternatively, the method includes:

mounting a power connector on the card; and

powering an antenna system external to the card via the power connector.

Preferably, transmitting the radio frequency signal includes modulating the signal in accordance with a modulation scheme determined responsive to a command conveyed via the bus.

Alternatively, transmitting the radio frequency signal includes encoding an error correction onto the signal in accordance with an encoding scheme determined responsive to a command conveyed via the bus.

Alternatively, the method includes connecting the transmitter card to at least one other card via an auxiliary connector, such that signals pass between the cards without passing through the industry-standard bus.

Preferably, transmitting the signal includes transmitting the signal to a satellite.

There is further provided, in accordance with a preferred embodiment of the present invention, a method for transmitting and receiving signals between a satellite and a personal computer including:

coupling a transmitter card to an industry-standard bus in the computer;

transmitting radio frequency signals from the transmitter card responsive to data from the bus;

coupling a receiver card to the industry-standard bus;

receiving radio frequency signals in the receiver card responsive to data from the bus; and

coupling the transmitter and receiver cards together directly via an auxiliary bus separate from the standard bus.

Preferably, receiving radio frequency signals includes conveying a synchronizing signal from the receiver card to the transmitter card via the auxiliary 5 bus.

The present invention will be more fully understood from the following detailed description of the preferred embodiments thereof, taken together with the drawings in which:

10 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic block diagram of a communications terminal coupled to an antenna system, in accordance with a preferred embodiment of the invention;

FIG. 2 is a schematic block diagram of a personal computer RF transmission card, in accordance with a preferred embodiment of the present invention;

15 FIG. 3 is a schematic block diagram of a personal computer RF transmission card coupled to a PC receiver card, in accordance with a preferred embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Reference is now made to Figure 1, which is a schematic block diagram of a communications terminal **10** coupled to an antenna system **70**, in accordance with a preferred embodiment of the present invention. In terminal **10** a transmitter card **25** or **60** is installed in a vacant slot of an industry-standard bus **45**, such as a PCI bus, comprising an address bus **46**, a data/control signal bus **48**, and a power bus **50**, as 25 well as additional lines, of a personal computer **11**. The busses of the computer are in

communication with corresponding busses of the card, and the output of the card is fed to antenna system **70**. The operation of transmitter cards **25** and **60** is described in detail hereinbelow.

Preferably, computer **11** comprises the following standard components: a
5   video display unit (VDU) **13**, a user interface device **15** comprising a mouse and/or a keyboard, a central processing unit (CPU) **19** such as an Intel Pentium processor, a memory **21** comprising volatile (generally RAM) memory and non-volatile memory, such as a hard disk, and a power supply **17**. Power supply **17** powers the above-mentioned standard components and the transmitter card. Preferably, personal
10   computer **11** also comprises a receiver card **54**, receiving its input from antenna system **70**. Receiver card **54** is installed in a vacant slot of computer **11** and is connected thereby to bus **45**.

Preferably, antenna system **70** comprises the following industry-standard components: a dish or flat plate antenna **23**, an orthomode transducer **27**, a low noise
15   block **29**, an upconverter **72**, and a power amplifier **12**. Transducer **27** directs signals received by antenna **23** to low noise block **29**, wherein the received signals are amplified and downconverted to a lower frequency, and are then transferred to receiver card **54**. Upconverter **72** converts transmitted signals from transmitter card **25** or **60** to a higher frequency range, typically a range in the Ku band, and the
20   converted signals are then amplified in power amplifier **12**. The converted signals are transferred via transducer **27** for transmission by antenna **23**. Most preferably, power for upconverter **72** and amplifier **12** is supplied from a power supply **52** via transmitter card **25** or **60**, as described below.

As will be seen below, transmitter cards **25** and **60** are similar. The main
25   difference between transmitter cards **25** and **60** is that transmitter card **25**

communicates with receiver card **54** exclusively via bus **45**, whereas transmitter card **60** also communicates with receiver card **54** via a fast interface bus connector, described below, that enables the exchange of data between transmitter card **60** and receiver card **54** without the delays associated with bus **45**.

5   Figure 2 is a schematic block diagram of transmitter card **25**, in accordance with a preferred embodiment of the present invention. Preferably, all active components of card **25** are powered from power bus **50**. A dedicated programmable main controller **26** controls the functioning of card **25**. Most preferably, controller **26** is a high performance integrated communications controller, such as a QUICC 68360

10   produced by Motorola Inc., of Phoenix, Arizona. Controller **26** is provided with a memory **35** for data storage. Controller **26** communicates with busses **46**, **48**, and **50** via a glue logic device **33** and a bus interface device **28**, such as a PLX9080, produced by PLX Technology Inc., of Sunnyvale, California. Controller **26** and other components on card **25** communicate with and are controlled by CPU **19** of personal

15   computer **11**, via busses **46** and **48**.

Modulation circuitry **37** comprises frequency synthesizer **14** and associated circuits providing a baseband-modulated input thereto, as described further hereinbelow. Synthesizer **14** generates and transmits an RF signal, preferably in the range 950 MHz - 3000 MHz, or in any sub-range therein. Most preferably,

20   synthesizer **14** is in a well-shielded and grounded enclosure, in order to substantially reduce noise transfer from the computer to the RF signal, and vice versa, as is known in the art. Preferably, synthesizer **14** is capable of supplying of the order of 1 mW of RF signal power into a connector **36**. Most preferably, connector **36** comprises a 75 ohm impedance F-type connector which in turn supplies the signal via a suitable

25   coaxial cable to antenna system **70**.

To generate on the order of 1 watt of RF power, which is the power typically required for transmission of signals via satellite, system **70** generally requires on the order of 50 watts of DC power at 24 VDC. Preferably, the power is supplied by a DC power supply **52**, external to the card and to the computer, the power supply receiving its power directly from an AC line source **54**, preferably operating in the 100-240 VAC range. The DC power is fed to antenna system **70** via a suitable power connector **34** on card **25** and via connector **36**.

Synthesizer **14** generates a specific radio frequency for a chosen channel of communication, for example 1000 MHz, according to commands received from controller **26**. The radio frequency is modulated using baseband signal levels from a digital-analog converter **16**, so that the modulated signal output from the synthesizer is compatible with an industry-standard protocol. Preferably, converter **16** also comprises a low-pass baseband filter to smooth the signals produced during the conversion.

The baseband signals provided to converter **16** are generated by a keying modulator **40** and a forward error correction (FEC) encoder **42**, whose respective functions are described in more detail hereinbelow. Most preferably, the functions of keying modulator **40** and encoder **42** are realized in a single field programmable gate array (FPGA) **20**, such as a FLEX6000 produced by Altera Corporation of San Jose, California. FPGA **20** is programmed by main controller **26**, or alternatively from PC bus **46** and/or PC bus **48**, in accordance with instructions stored in memory **21** (Figure 1). Alternatively, two or more field-programmable devices may be used to implement the modulator and encoder, and/or factory-programmed or hard-wired logic may be used for this purpose. Further alternatively, one or more application

specific integrated circuits (ASICs) may be used to implement the modulator and encoder.

Keying modulator **40** supplies modulation signals in a standard format, such as one of the phase shift keying (PSK) formats known in the art, for example MSK,

5 BPSK, DPSK, QPSK, or OQPSK. The format may be chosen according to whatever protocol is required by a receiving station, such as a VSAT hub, that is to receive the signals from card **25**, and is loaded into FPGA **20** as described above. It will be understood that where the format needs to be changed, e.g., for transmission to a different receiving station, FPGA **20** may be reprogrammed by the PC, preferably by

10 loading a suitable program into FPGA **20** from memory **21**. The reprogramming may be performed automatically according to a communications channel that is chosen, or may be performed via user interface **15** (Figure 1).

The data input to FPGA **20** is derived from the information to be transmitted, and is received by FPGA **20** from controller **26**. For example, the data may comprise

15 IP packets transmitted on any suitable bus known in the art.

Encoder **42** generates an optional forward error correction (FEC) signal for encoding onto the transmitted signal, by one of the standard methods known in the art such as Viterbi, concatenated, Turbo, or Reed-Solomon coding. Typically, the FEC encoding adds some redundant information to the transmitted signal, for the purpose

20 of improving signal recovery at the receiver. The method chosen is dependent on the requirements of the receiving station, and is programmable into FPGA **20** as described above.

Reference is now made to Figure 3, which is a schematic block diagram of a transmission card **60**, in accordance with a preferred embodiment of the present

25 invention. Apart from the differences described below, card **60** is generally similar to

card **25** (Figure 2), and elements indicated by the same reference numerals in both card **25** and card **60** are generally identical in construction and operation. In addition to the elements of card **25**, card **60** comprises an auxiliary connector, to wit, a fast interface bus connector **41**, which is coupled to transfer signals to and from controller

5   **26** via a receiver interface **62** and a first-in first-out (FIFO) buffer **31**. Preferably, interface **62** is a functional block contained in FPGA **20**. Connector **41** enables signals to be sent to and from other cards in the personal computer having similar fast interface bus connectors, without the delay and jitter introduced by standard PC busses.

10   Most preferably, connector **41** is connected by a cable **39** or mating connector to a similar connector **52** on receiver card **54** installed in the PC and is used to route data and synchronize the operation of the transmitter and receiver cards, for example, as described in the abovementioned U.S. patent application 09/135,502. Receiver card **54** comprises receiver circuitry **56**, described in detail hereinbelow, which

15   communicates directly with connector **41**, and also communicates with busses **46**, **48**, and **50**. Preferably, when the receiver and transmitter cards are communicating with a remote receiver/transmitter, such as a VSAT hub, using a slotted communications protocol, the receiver card transfers data to the transmitter card via connector **41**. Controller **26** recovers a synchronizing pulse from the data, and uses the

20   synchronizing pulse to time the transmissions of card **60** according to the protocol being used.

Receiver circuitry **56** most preferably comprises a tuner **51**, an ASIC-based receiver **53**, and an MPEG2 demultiplexer and decoder device **59**. Tuner **51** receives incoming signals, typically digital video broadcast (DVB) signals, from Low Noise

25   Block **29** of antenna system **70** (Fig. **1**) and divides the signals to I and Q components,

as is known in the art. ASIC-based receiver **53** demodulates and converts the I and Q signals to digital data, and transfers the data to device **59**. Most preferably, the data from ASIC-based receiver **53** is also transferred to connector **52** and from there to card **60**, as described hereinabove. Decoder **59** utilizes a RAM **57** to store interim data used in its operation. Tuner **51**, ASIC-based receiver **53**, and decoder **59** communicate with bus **45** via a bus interface **55**.

It will be appreciated that while the preferred embodiments described above refer specifically to satellite transmission, the transmitter card may be used to generate RF signals for terrestrial transmission, as well. It will thus be appreciated that the preferred embodiments are cited herein by way of example, and the full scope of the invention is limited only by the claims.

WHAT IS CLAIMED IS:

1.   A transmitter card for a personal computer, comprising:

(a)   a circuit board which plugs into the personal computer and which is coupled to exchange data via an industry-standard bus in the personal computer; and

(b)   radio frequency modulation circuitry on the circuit board, which receives the data and transmits radio frequency signals responsive thereto.

2.   A card according to claim 1, wherein the circuitry comprises a frequency synthesizer generating the radio frequency signals.

3.   A card according to claim 2, wherein the frequency generated by the frequency synthesizer is set by a controller on the circuit board.

4.   A card according to claim 2, wherein the frequency generated by the frequency synthesizer is set by conveying instructions via the computer bus.

5.   A card according to claim 1, wherein the card is coupled to an external antenna system, and comprising a connector, through which a DC source external to the card powers the antenna system.

6.   A card according to claim 5, wherein the frequency modulation circuitry is coupled to convey the radio frequency signals to the antenna system via the connector.

7.   A card according to claim 1, wherein the modulation circuitry modulates the transmitted signals according to a predefined protocol in accordance with a command conveyed to the card via the industry-standard bus.

8.   A card according to claim 1, wherein the modulation circuitry comprises an encoder which encodes error correction into the transmitted signals according to a predefined protocol in accordance with a command conveyed to the card via the industry-standard bus.

9.   A card according to claim 1, and comprising an auxiliary connector through which the card is coupled to at least one other card located in the computer, such that signals pass between the cards without passing through the industry-standard bus.

10.   A card according to claim 1, wherein the signals are transmitted to a satellite.

11.   A radio frequency (RF) communication card for a personal computer, comprising:

(a)   a circuit board which plugs into the personal computer and which is coupled to exchange data via an industry-standard bus in the personal computer;

(b)   RF circuitry on the circuit board, which receives the data and processes RF signals responsive thereto; and

(c)   an auxiliary connector through which the card is coupled to at least one other card located in the computer, such that signals pass between the cards without passing through the industry-standard bus.

12.   A card according to claim 11, wherein the communication card conveys a synchronizing signal via the auxiliary connector.

13.   A satellite transceiver for a personal computer, comprising:

(a)   a transmitter card which plug's into the personal computer and which is coupled to exchange data via an industry-standard bus in the personal computer and which transmits radio frequency signals responsive to the received data;

(b)   a receiver card which plugs into the personal computer and which is coupled to transfer data via the industry-standard bus and which receives radio frequency signals and converts the received signals to data for transfer via the bus; and

(c)   an auxiliary bus directly connecting the transmitter card and the receiver card.

14. A transceiver according to claim 13, wherein the transmitter card and the receiver card comprise respective connectors coupling the cards to the auxiliary bus.

15. A method for transmitting a radio frequency signal directly from a personal computer, comprising:

    (a)   mounting a transmitter card in the personal computer;

    (b)   conveying data to the card via an industry-standard computer bus in the personal computer; and

    (c)   transmitting the radio frequency signal from the card responsive to the data.

16. A method according to claim 15, wherein conveying data to the card comprises determining a frequency band of the signal.

17. A method according to claim 15, and comprising: mounting a power connector on the card; and powering an antenna system external to the card via the power connector.

18. A method according to claim 15, wherein transmitting the radio frequency signal comprises modulating the signal in accordance with a modulation scheme determined responsive to a command conveyed via the bus.

19. A method according to claim 15, wherein transmitting the radio frequency signal comprises encoding an error correction onto the signal in accordance with an encoding scheme determined responsive to a command conveyed via the bus.

20. A method according to claim 15, and comprising connecting the transmitter card to at least one other card via an auxiliary connector, such that signals pass between the cards without passing through the industry-standard bus.

21. A method according to claim 15, wherein transmitting the signal comprises transmitting the signal to a satellite.

22. A method for transmitting and receiving signals between a satellite and a personal computer comprising:

(a) coupling a transmitter card to an industry-standard bus in the computer;

(b) transmitting radio frequency signals from the transmitter card responsive to data from the bus;

(c) coupling a receiver card to the industry-standard bus;

(d) receiving radio frequency signals in the receiver card responsive to data from the bus; and

(e) coupling the transmitter and receiver cards together directly via an auxiliary bus separate from the industry-standard bus.

23.   A method according to claim 22, wherein receiving radio frequency signals comprises conveying a synchronizing signal from the receiver card to the transmitter card via the auxiliary bus.

ABSTRACT OF THE DISCLOSURE

A transmitter card for a personal computer includes a circuit board which plugs into the personal computer and which is coupled to exchange data via an industry-standard bus in the personal computer. Radio frequency modulation circuitry on the circuit board receives the data and transmits radio frequency signals responsive thereto.

23

ORTHOMODE
TRANSDUCER   27

70

LOW
NOISE
BLOCK

POWER
AMPLIFIER   12

UPCONVERTER   72

29

13

25, 60

TRANSMITTER
CARD

VDU

CPU

POWER
SUPPLY

19

MEMORY

52

21

RECEIVER
CARD

54

POWER SUPPLY

USER
INTERFACE   15

11   45,
46,48,50   17

10

FIG. 1

TO ANTENNA
UP-
CONVERTER

37

14 SYNTHESIZER

16

40 MODULATOR

20 42 ENCODER

36

34

35 MEMORY

MAIN
CONTROLLER

GLUE
LOGIC

33

BUS
INTERFACE

POWER
SUPPLY

45{

46

48

50

26

28

25

52

54

11

FIG. 2

TO ANTENNA
UP-
CONVERTER

37

14 SYNTHESIZER

16

62

40 MODULATOR

20 ENCODER

42

36

41

34

RECEIVER
INTERFACE

FIFO

31

35 MEMORY

MAIN
CONTROLLER

GLUE
LOGIC

33

BUS
INTERFACE

26

28

60

POWER
SUPPLY

45 {

46 48 50

52

54

39

56

54

52

51 TUNER

53 ASIC

MPEG2
DEMUX &
DECODER

59

RAM

57

BUS I/F

55

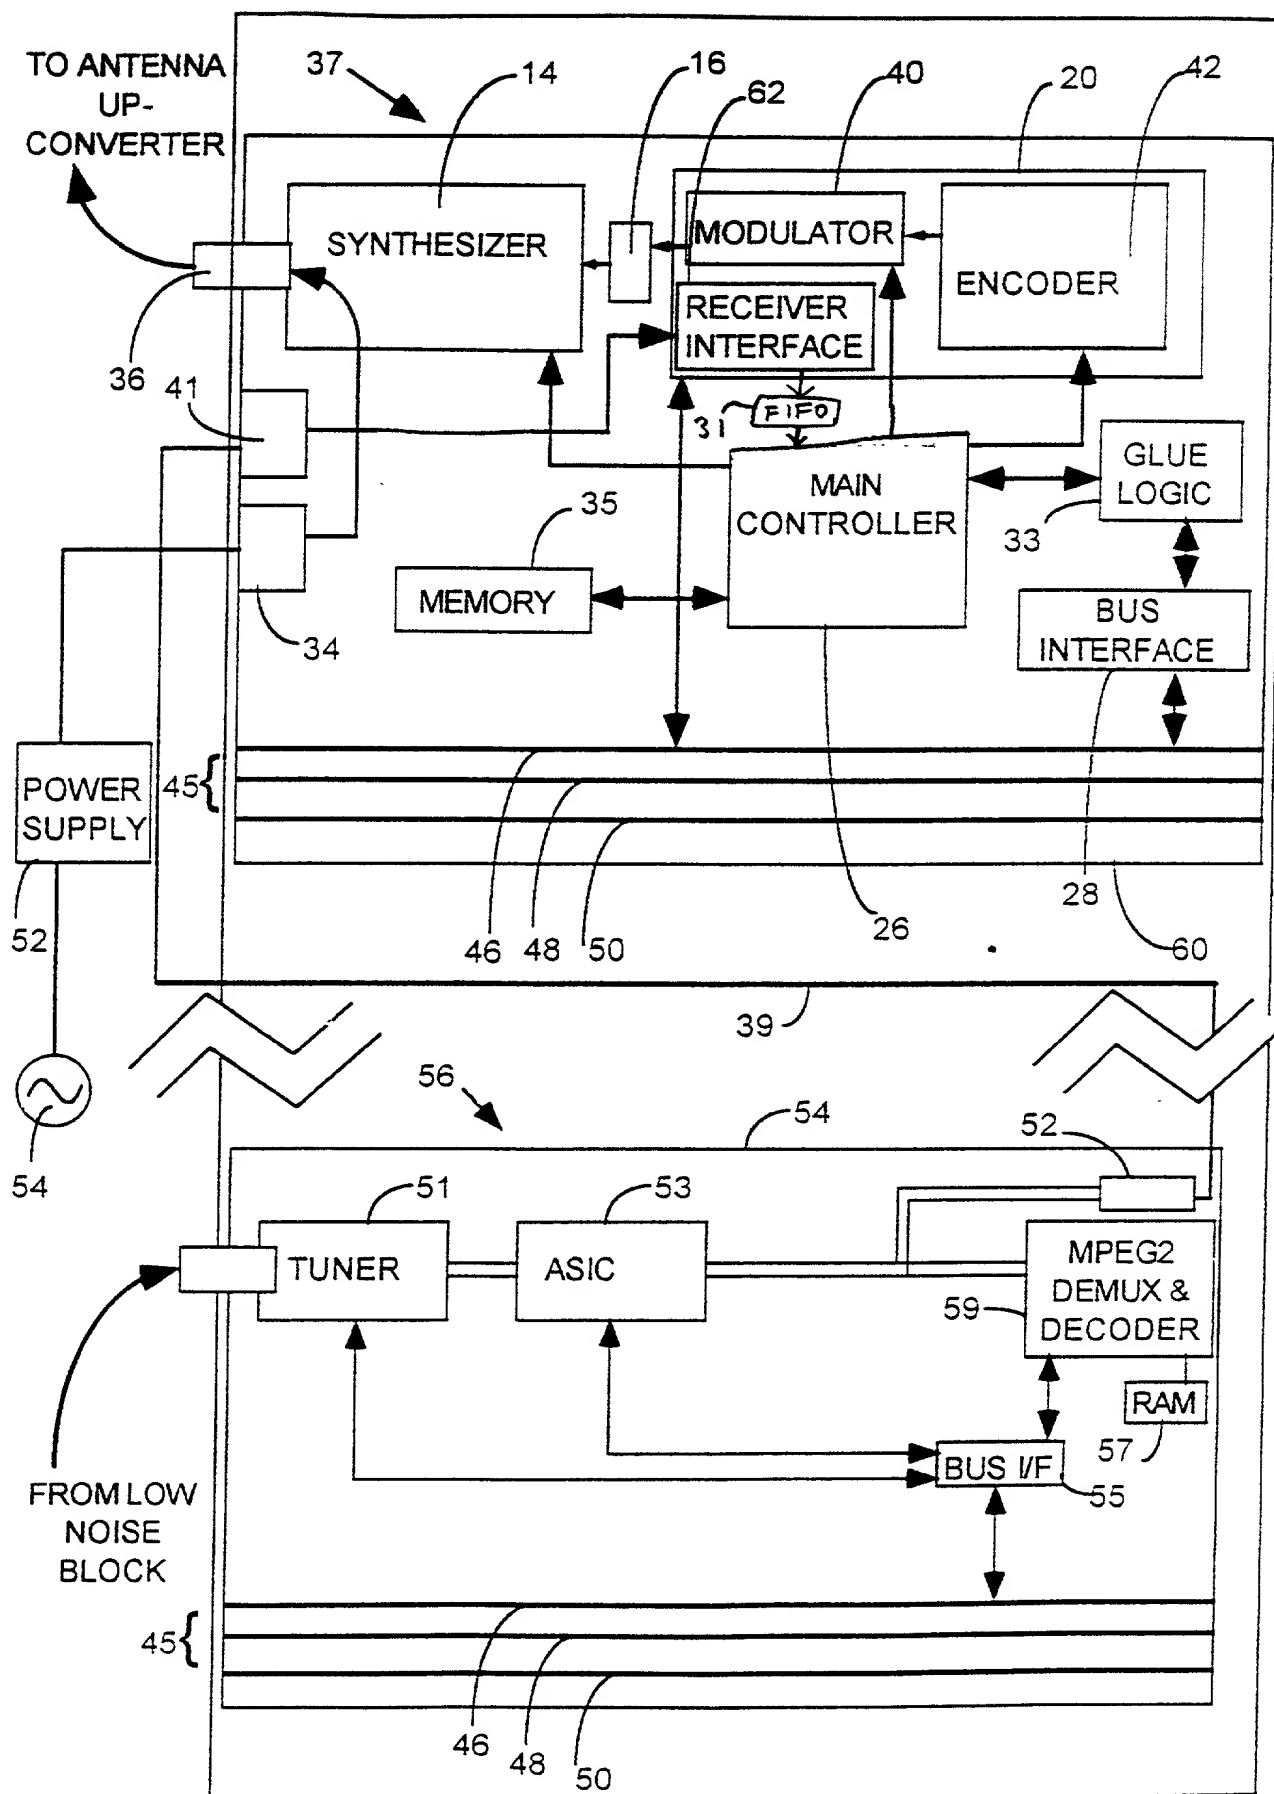FROM LOW
NOISE
BLOCK

45 {

46 48 50

11
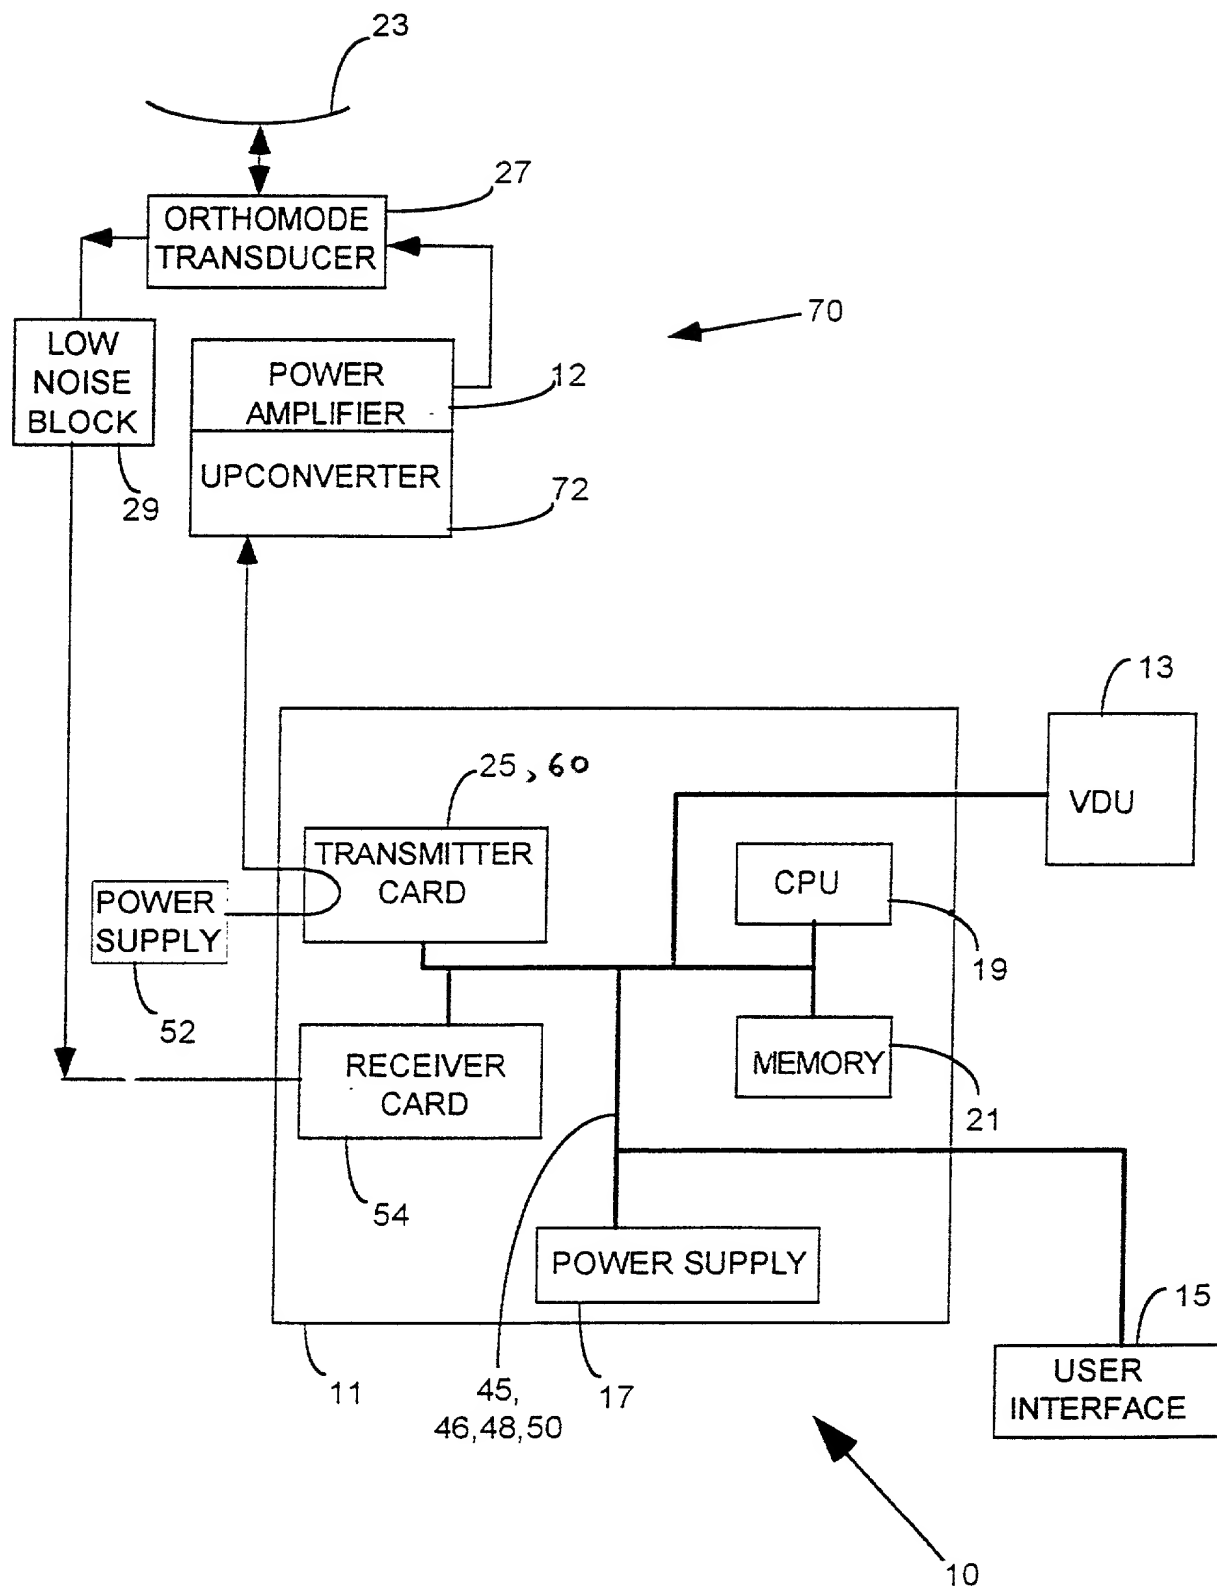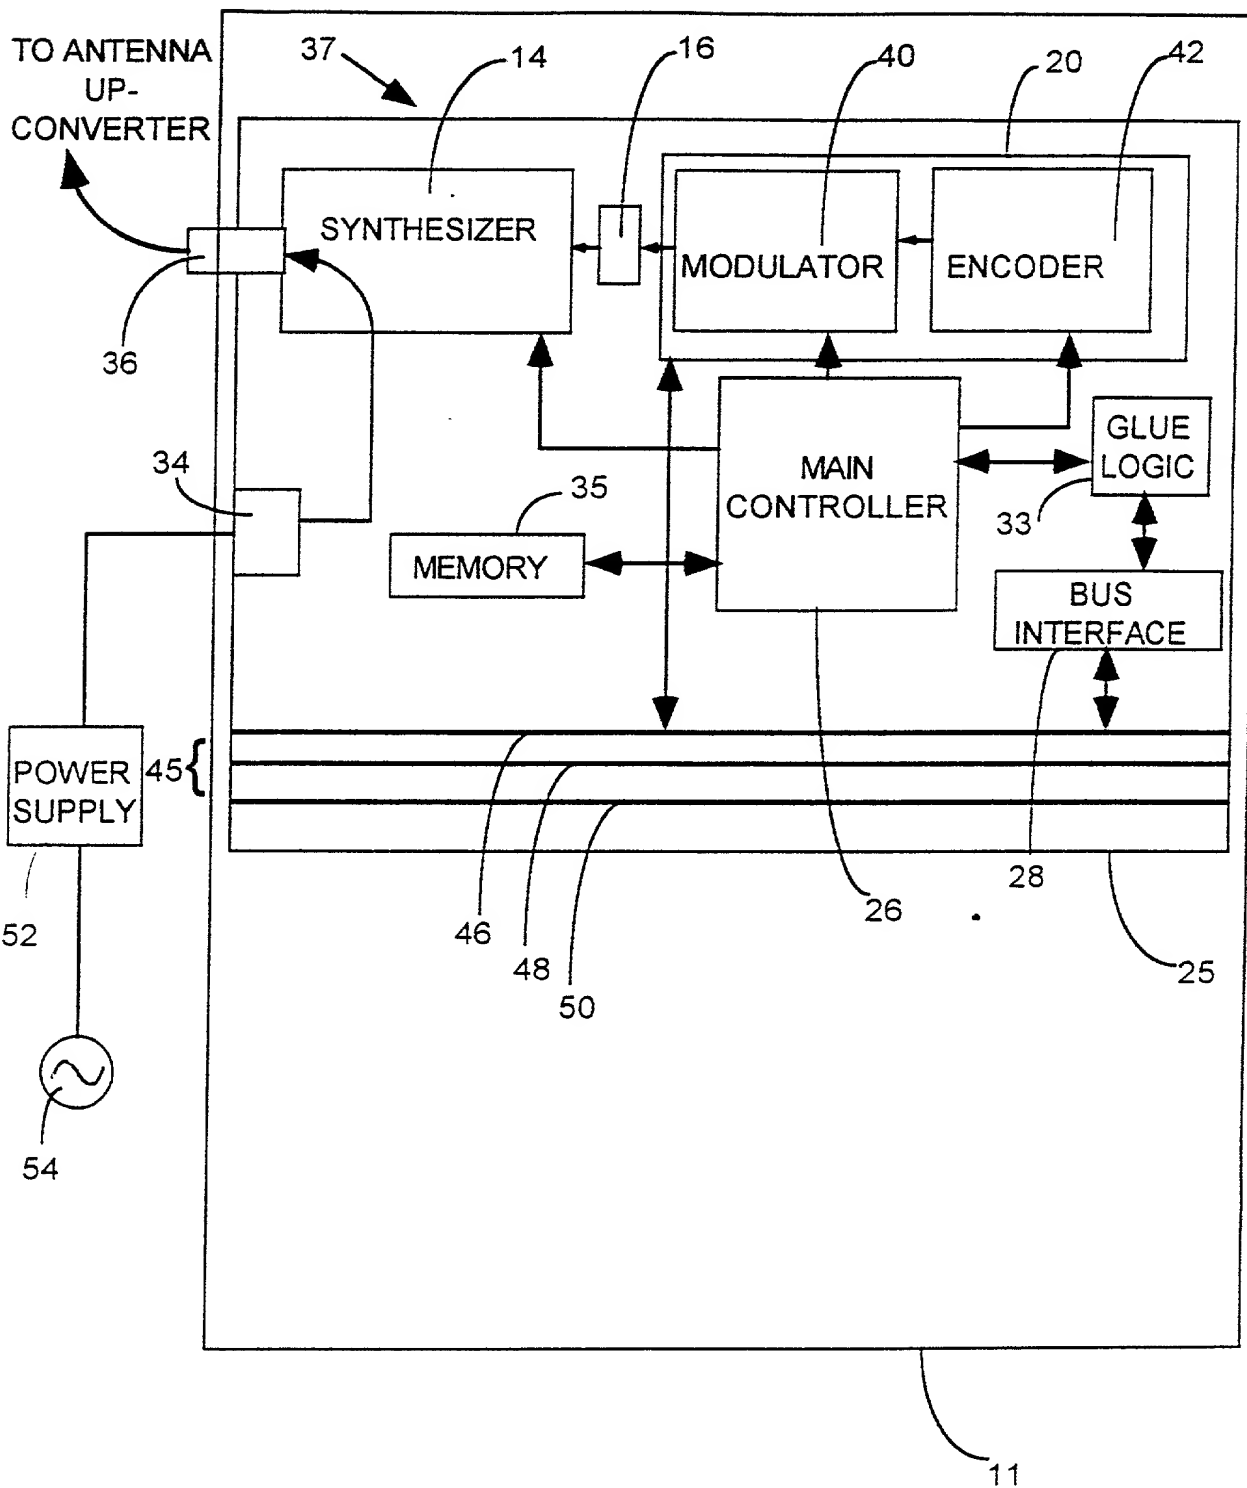
FIG. 3

Attorney Docket: 1576/1
page 1 of 3

Combined Declaration For Patent Application and Power of Attorney

As a below named Inventor, I hereby declare that:
      . My residence, post office address and citizenship are as stated below next to my name;
       I believe I am the original, first and sole Inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled __SATELLITE COMMUNICATION CARD,__ the specification of which
(check one)   ☒ is attached hereto.
         ☐ was filed on   as Application Serial No.   and was amended on   . I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.
       I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).
       I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or Inventor's certificate listed below and have also identified below any foreign application for patent or Inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)   Priority Claimed
  __NONE__   _____   _____   ☐   ☐
  (number)   (Country)   (Day, Month, Year Filed)   Yes No
  _____   _____   _____   ☐   ☐
  (number)   (Country)   (Day, Month, Year Filed)   Yes No
  _____   _____   _____   ☐   ☐
  (number)   (Country)   (Day, Month, Year Filed)   Yes No

       I hereby claim the benefit under Title 35, United States Code, § 120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

  __NONE__   _____
(Application Serial No.)   (Filing Date)   Status
                            (patented, pending, abandoned)

_____   _____
(Application Serial No.)   (Filing Date)   Status
                            (patented, pending, abandoned)

       I hereby appoint the following attorneys, with full power of substitution, association, and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Mark M. Friedman   Registration No. 33,883

Address all Correspondence to:

DR. MARK FRIEDMAN LTD.	Direct all telephone calls & faxes to:
c/o ANTHONY CASTORINA	ROBERT SHEINBEIN
2001 JEFFERSON DAVIS HIGHWAY	Phone (703) 415-1581
SUITE 207	Fax (703) 415-4864
ARLINGTON, VIRGINIA 22202	

Attorney Docket: 1576/1
page 2 of 3

Continuation of Combined Declaration For Patent Application and Power of Attorney

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statement may jeopardize the validity of the application of any patent issued thereon.

*FULL NAME OF SOLE OR FIRST INVENTOR	INVENTOR'S SIGNATURE	DATE
ITZIK BEN-BASSAT	X	X 10/March/99
RESIDENCE	CITIZENSHIP	
HAREI YEHUDA 52, GANEI TIKVAH, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
HAREI YEHUDA 52, GANEI TIKVAH, ISRAEL ZIP 55900		

*FULL NAME OF SECOND INVENTOR	INVENTOR'S SIGNATURE	DATE
IDO OPHIR	X	X 10/March/99
RESIDENCE	CITIZENSHIP	
HAHAYAL 65, RAANANA, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
HAHAYAL 65, RAANANA, ISRAEL		

*FULL NAME OF THIRD INVENTOR	INVENTOR'S SIGNATURE	DATE
RAFI BONEH	X Rafi Boneh	X 10/3/99
RESIDENCE	CITIZENSHIP	
HAYASMIN 7, TEL AVIV, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
HAYASMIN 7, TEL AVIV, ISRAEL		

*FULL NAME OF FOURTH INVENTOR	INVENTOR'S SIGNATURE	DATE
YOSSI GAL	X Yossi Gal	X 14/3/99
RESIDENCE	CITIZENSHIP	
AYA 108, KARMIEL, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
AYA 108, KARMIEL, ISRAEL		

*FULL NAME OF FIFTH INVENTOR	INVENTOR'S SIGNATURE	DATE
ARIEL GOLDFARB	X	X 10/March/99
RESIDENCE	CITIZENSHIP	10/3/99
BAR KOCHVA 10/3, HERZLIYA, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
BAR KOCHVA 10/3, HERZLIYA, ISRAEL		

*FULL NAME OF SIXTH INVENTOR	INVENTOR'S SIGNATURE	DATE
TAL MARCUS	X	X 10/March/99
RESIDENCE	CITIZENSHIP	
DEGEL REUVEN 6, PETAH TIKVAH, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
DEGEL REUVEN 6, PETAH TIKVAH, ISRAEL		

04.MAR.1999 8:14:30 ☎972 GILAT R&D   +972 3 9213299 FRIEDMAN
   972 3 5625554

Attorney Docket: 1576/1
page 3 of 3

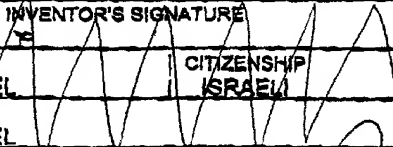### Continuation of Combined Declaration For Patent Application and Power of Attorney

*FULL NAME OF SEVENTH INVENTOR	INVENTOR'S SIGNATURE	DATE
OFER SHAFIR	אופר שפיר	10/MARCH/99
RESIDENCE	CITIZENSHIP	
KESHET 39, ROSH HAAYIN, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
KESHET 39, ROSH HAAYIN, ISRAEL		

*FULL NAME OF EIGHTH INVENTOR	INVENTOR'S SIGNATURE	DATE
DAVID RAHAMIM		11.3.99
RESIDENCE	CITIZENSHIP	
HERUT 46, RAMAT GAN, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
HERUT 46, RAMAT GAN, ISRAEL		

*FULL NAME OF NINTH INVENTOR	INVENTOR'S SIGNATURE	DATE
AMIR COMFORTI		14.3.99
RESIDENCE	CITIZENSHIP	
ZALMAN SHNEOR 71, HAIFA, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
ZALMAN SHNEOR 71, HAIFA, ISRAEL		

*FULL NAME OF TENTH INVENTOR	INVENTOR'S SIGNATURE	DATE
YARIV HAYOUN		14.3.99
RESIDENCE	CITIZENSHIP	
EITAN 52, NIR ZVI, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
EITAN 52, NIR ZVI, ISRAEL		

*FULL NAME OF ELEVENTH INVENTOR	INVENTOR'S SIGNATURE	DATE
OREN SHEICH		15.3.99
RESIDENCE	CITIZENSHIP	
BENTAL 48/2, YOKNEAM, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
BENTAL 48/2, YOKNEAM, ISRAEL		

*FULL NAME OF TWELFTH INVENTOR	INVENTOR'S SIGNATURE	DATE
ILAN OSDON		
RESIDENCE	CITIZENSHIP	
HAAHIM ISRAELIT 14, PETAH TIKVAH, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
HAAHIM ISRAELIT 14, PETAH TIKVAH, ISRAEL		

FULL NAME OF THIRTEENTH INVENTOR	INVENTOR'S SIGNATURE	DATE
ERAN RIDEL		11.3.99
RESIDENCE	CITIZENSHIP	
MIVZA HEIRAM 11, ROSH HAAYIN, ISRAEL	ISRAELI	
POST OFFICE ADDRESS		
MIVZA HEIRAM 11, ROSH HAAYIN, ISRAEL		